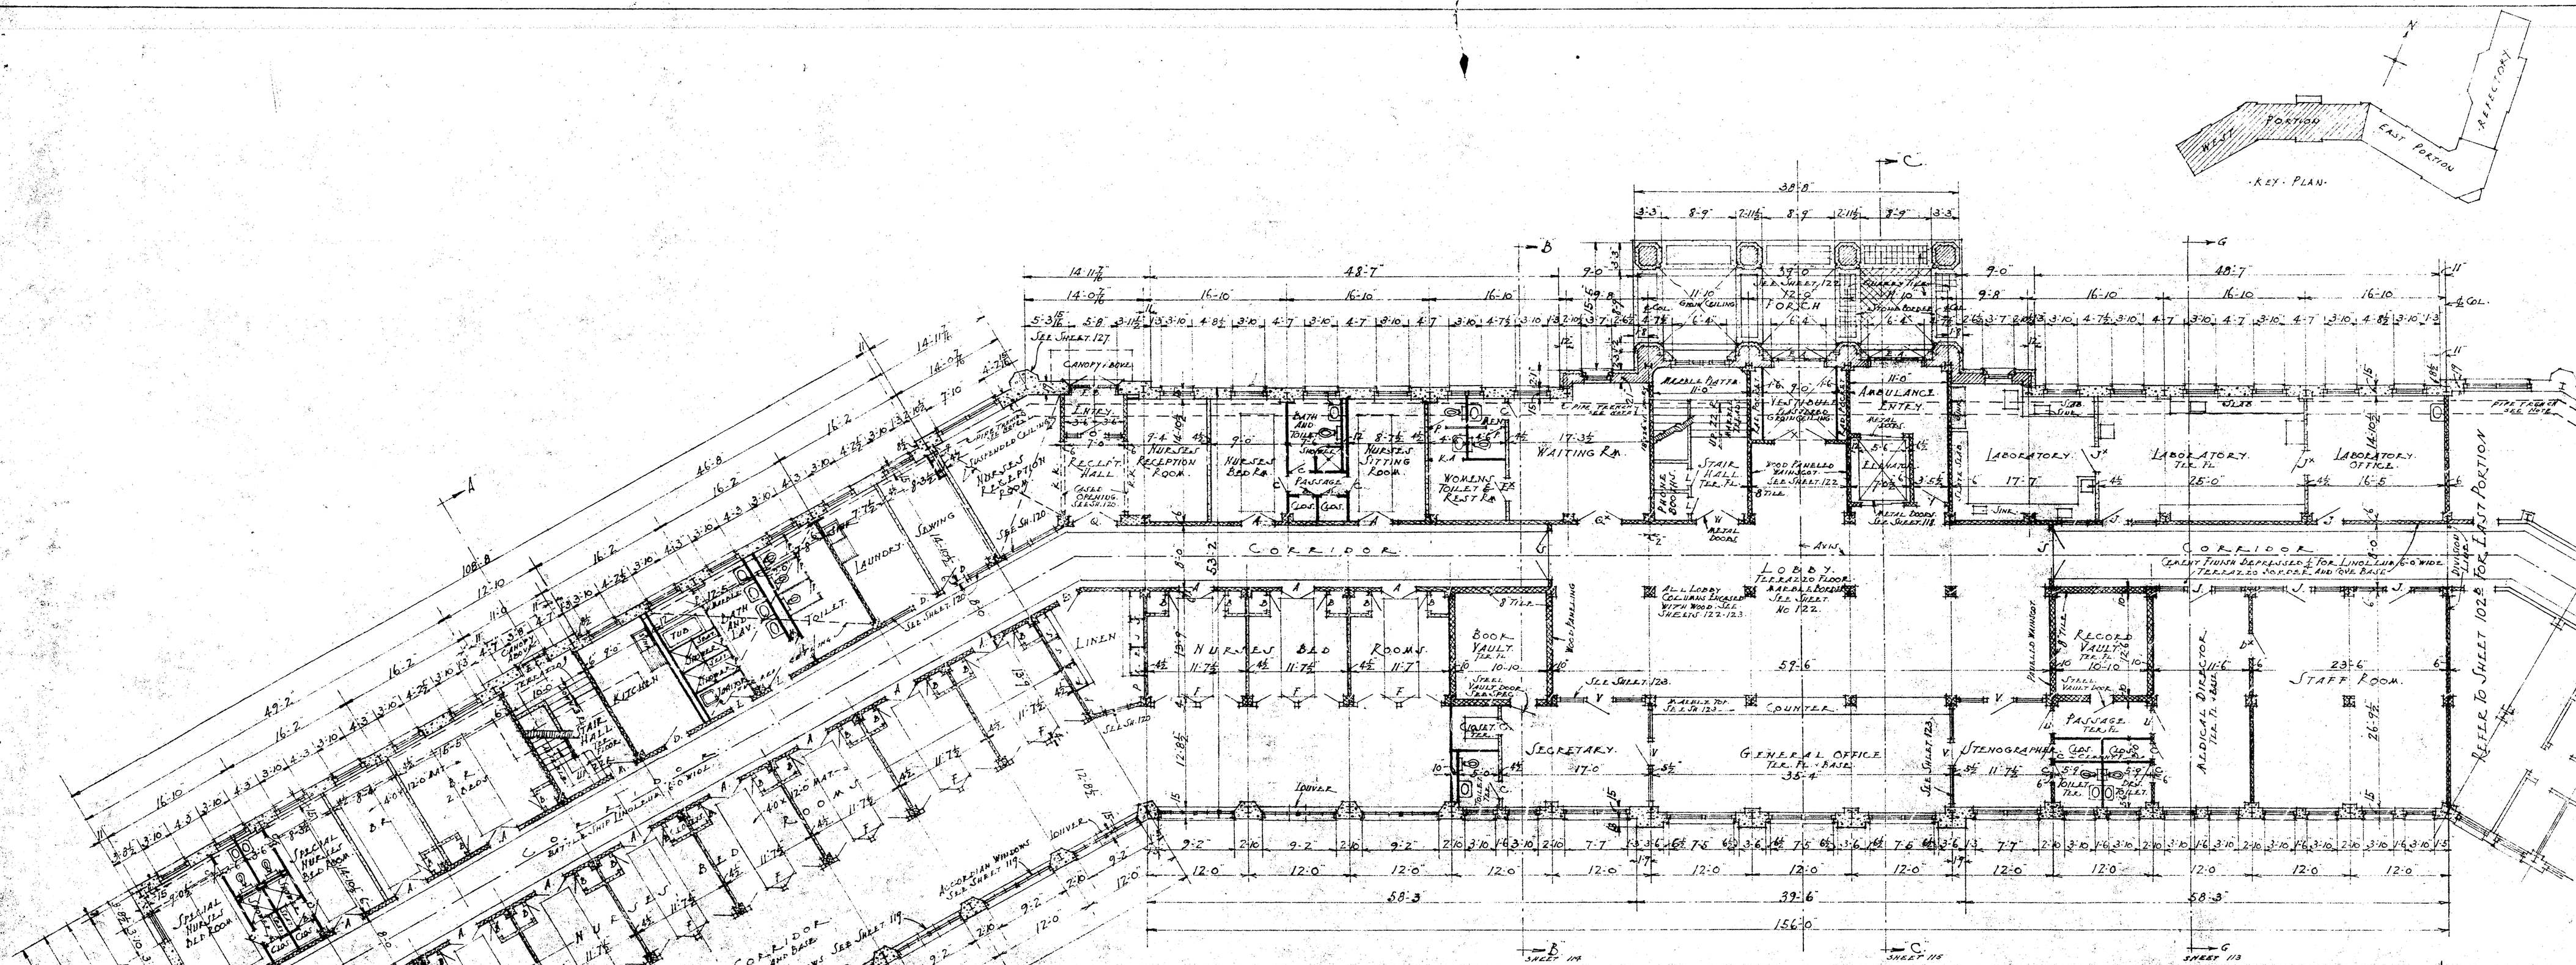

SCHEDULE OF EXTERIOR DOORS

				Sheet Number
E.A	TWO	3'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM	124.
E.B	TWO	2'-8" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM	127.
E.C.		3'-4" x 7'-0" x 1¾"	SASH DOOR. NO TRANSOM.	108.
E.D	TWO	3'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM	111.
E.E	TWO	3'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM	112.
E.F	TWO	3'-6" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM	119.
E.G		2'-8" x 7'-0" x 1¾"	SASH DOOR AND TRANSOM	114.

SCHEDULE OF INTERIOR DOORS

				Sheet Number
A.	TWO.	2'-0" x 7'-0" x 1⅜"	SOLID DOORS & TRANSOM.	119.
A*	SAME AS A EXCEPT		TRANSOM SASH AS NOTED ON SHEET.	119
B.		1'-9" x 6'-3" x 1⅜"	SOLID DOOR. " NO TRANSOM.	119.
C.		2'-0" x 7'-0" x 1⅜"	" "	120.
C.S		2'-6" x 6'-6"	COLD STORAGE DOORS. NOT IN GEN. CONTRACT.	
D.		3'-0" x 7'-0" x 1¾"	SOLID DOOR AND TRANSOM	120.
D*	SAME AS D. EXCEPT		NO TRANSOM.	120.
D.A	TWO	2'-8" x 7'-0" x 1⅜"	SASH DOORS. NO TRANSOM	117.
E		2'-8" x 7'-0" x 1⅜"	SOLID DOOR. AND TRANSOM (EX SASH DOOR)	120.
E*	SAME AS E		EXCEPT NO TRANSOM.	120.
F.	FOUR.	2'-4" x 7'-0" x 1⅜"	SASH DOORS AND TRANSOM.	119.
F.T	SAME AS F.		EXCEPT TRANSOM SASH AS NOTED ON SHEET.	119.
G	TWO.	2'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM.	120.
H		3'-4" x 7'-0" x 1¾"	SASH DOOR AND TRANSOM	120
I.		3'-0" x 7'-0" x 1¾"	SASH DOOR. NO TRANSOM. (DOUBLE ACTING)	120
J.		3'-0" x 7'-0" x 1¾"	SASH DOOR AND TRANSOM	120.
J*	SAME AS J		EXCEPT TRANSOM SIZE. SEE SHEET.	119
J*	" " J.		NO TRANSOM.	119
K		3'-0" x 7'-6"	CASED OPENING.	120.
K.K		8'-0" x 8'-2"	" "	120.
K.A		4'-0" x 7'-0"	" "	120.
L		2'-0" x 7'-0" x 1⅜"	SASH DOOR. NO TRANSOM	120.
M.		3'-0" x 7'-0" x 1¾"	METAL SASH DOORS AND TRANSOM.	120
M*	SAME AS M.		EXCEPT NO TRANSOM.	120
M.D.		3'-0" x 7'-0" x 1¾"	METAL SASH DOOR. SIDELIGHTS & TRANSOM.	118
M.A		3'-8" x 7'-0" x 1¾"	" SOLID " NO TRANSOM	120
M.*		3'-8" x 7'-0" x 1¾"	" " " NO TRANSOM.	120.
M.*		3'-8" x 7'-0" x 1¾"	" SASH " AND TRANSOM.	120
N.		1'-6" x 7'-0" x 1¼"	SOLID WOOD DOOR. TO PIPE SPACES.	120
O.		3'-0" x 7'-0" x 1¾"	SASH DOOR. SIDELIGHTS AND TRANSOM	120.
P.		1'-10" x 6'-0" x 1⅜"	VATTE GLOSS & SHOWER STALL DOORS.	120.
Q.	TWO	2'-8" x 7'-0" x 1⅜"	SASH DOORS AND TRANSOM. SAME AS	119. 120.
Q.*	TWO.	2'-8" x 7'-0" x 1⅜"	SASH DOORS. NO TRANSOM.	123
Q.*	TWO	2'-8" x 7'-0" x 1⅜"	SOLID DOORS. NO TRANSOM.	117.
R	TWO	2'-0" x 7'-0" x 1⅜"	SASH DOORS & TRANSOM. SAME AS G. EXCEPT TWO	120

INTERIOR DOORS (CONTINUED)

				Sheet Number
J.	TWO.	3'-0" x 7'-0" x 1¾"	SASH DOORS. NO TRANSOM.	123.
J.T.	TWO	3'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM.	117.
J*	TWO.	3'-0" x 7'-0" x 1¾"	SOLID DOORS. NO TRANSOM.	117.
T.		2'-8" x 7'-0" x 1¾"	METAL SOLID DOOR.	120.
U		2'-8" x 7'-0" x 1¾"	SASH DOOR. NO TRANSOM.	123.
V.		3'-0" x 7'-0" x 1¾"	" "	123.
V.	TWO	2'-8" x 7'-0" x 1¾"	METAL SASH DOORS.	123.
X	TWO.	3'-0" x 7'-0" x 1¾"	SASH DOORS AND TRANSOM.	123.
Y		2'-8" x 7'-0" x 1¾"	SASH DOOR. NO TRANSOM	123
Z		3'-8" x 7'-0" x 1¾"	SOLID DOOR AND TRANSOM.	120.
Z*	SAME AS Z.		EXCEPT NO TRANSOM.	120.
Z*		3'-8" x 7'-0" x 1¾"	SASH DOOR AND TRANSOM.	120.
E*	SAME AS E.		EXCEPT SASH DOOR. OBSCURED GLASS	114.
P*		2'-6" x 6'-0" x 1⅜"	SOLID DOOR. (BATH ROOMS)	

REFER TO PLANS FOR TYPE OF PARTITIONS AND JAMB THICKNESS FOR ALL DOORS. ALSO REFER TO SHEETS. 118-119-120.

PIPE TRANSOM TO HAVE 2½" THICK ASBESTOS TER-PLATE COVERS WITH BRASS STRIPS ALONG EDGES.

KEY TO MATERIALS

EARTH	CLAY TILE	PLASTER
CONCRETE	GYPSUM	TERRAZZO
BRICK IN SECTION	SOLID PLASTER PART.	MARBLE
BRICK IN ELEVATION	STEEL	SHEET METAL IN ELEVATION
STONE	WOOD	

HOSPITAL
WAVERLY HILL SANITARIUM
VALLEY STATION · JEFFERSON COUNTY, KY.

DRAWN BY LUEDING

D.X. MURPHY & BRO. ARCHITECTS
LOUISVILLE, KENTUCKY

SHEET NO. 102a